



## ***INSTRUCTIONS***

### ***USING NEW CLAMPS WITH LEGACY RS SHIFTER***


**Version: 1.0**

**Last Update: 05.03.06**

Thank you for your purchase of the new clamps package. Please read through the following instructions before you install the new clamps with your legacy RS Shifter.

### ***What does the package include?***

- Clamp with rubber pad x 2
- Metal plate

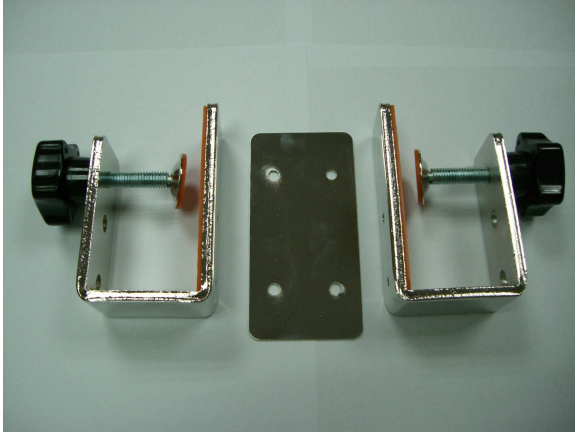

### ***How to install the new clamps with RS Shifter?***

1. Unscrew and remove the old shifter bar from the RS Shifter. Keep the screws which will be needed to install the new clamps.
2. Remove the metal plate from the package and put it at the bottom of the casing as shown in the following picture. Align the 4 screw holes on the metal plate with holes in the casing.



3. Tighten the screws by using a long Philips #1 screw driver.



The following picture shows how RS Shifter should look after you finish the installation.

